





IGO T85 A



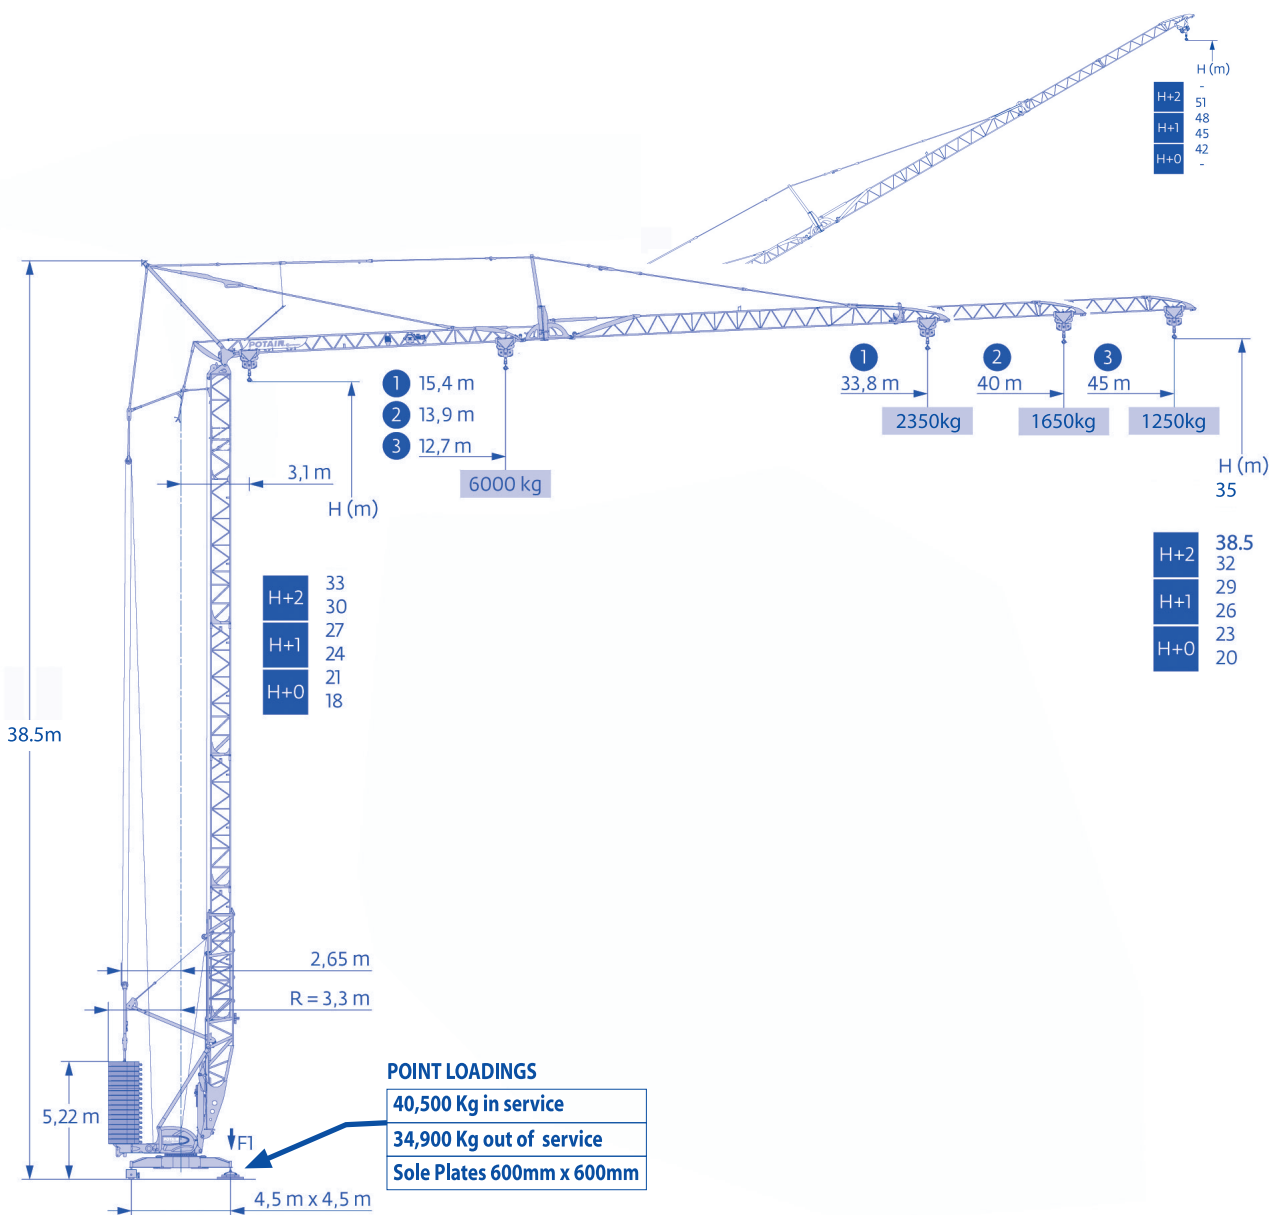

Load Curves

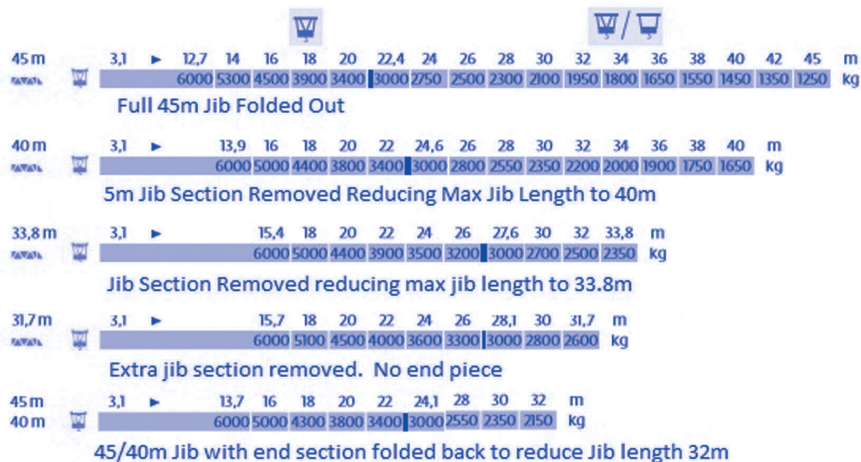

4 fall rope operation

4 fall or 2 fall rope operation



Speed of Mechanisms

400 V - 50 Hz 480 V - 60 Hz													ch - PS hp	kW
	20 LVF 15 Optima	m/min	3,3	17	29	55	69	1,6	8,5	14,5	27,5	34,5	20	15
		kg	3000	3000	3000	1500	750	6000	6000	6000	3000	1500		
	5 DVF 5	m/min	15 - 30 - 40 (2000 → 6000 kg) 15 - 30 - 55 (0 → 2000 kg)										5,5	4
	RVF 151 Optima+	tr/min U/min rpm	0 → 0,8										5,5	4
	TVF 324	m/min	25										2 x 4	2 x 3

Power Requirements

Main Electricity	kVA	Generator
400V (+6%-10%)50Hz	31 kVA	60 kVA




Weights


Dead Weight without Transport Axles	18,100 Kg	BALLAST WEIGHTS	
Dead Weight with Transport Axles	21,050 Kg	16 No. @ 2,200 Kg	35,200kg
		Total	35,200kg



Mode of Transport

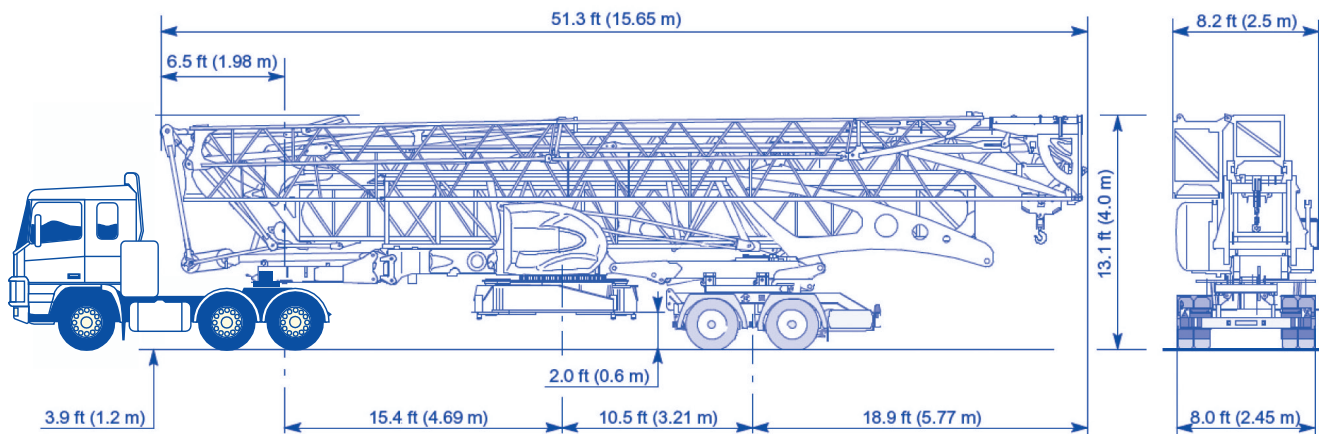

Erection Schematic

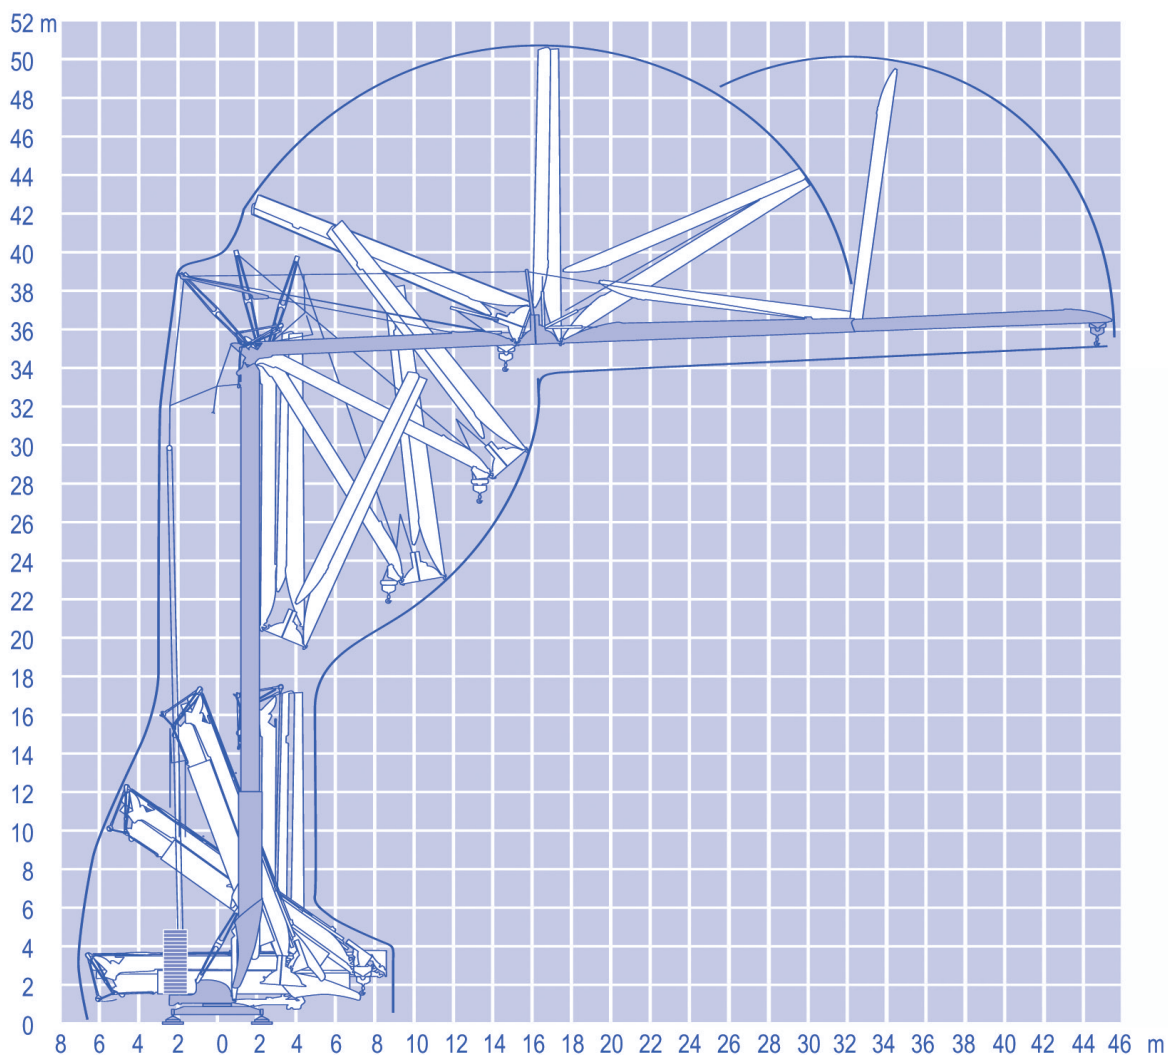



Model shown in picture may not be this actual model



Crane Hire, Sales & Support Services

HEAD OFFICES LOCATED AT:

IRELAND

Mantis Cranes Ireland

Lismulladuff, Killygordon, Lifford,
Co. Donegal, Ireland, F93 AW73
Tel: +353 (0)74 9149981
info@mantiscranes.ie

UK

Mantis Cranes UK

Upper Higham Lane,
Rushden, Northants, NN10 0SU
Tel: +44 (0) 1933 460883
info@mantiscranes.co.uk

www.mantiscranesgroup.com

This commercial document is not legally binding. Changes may be made to the content without any notification.